


## Technical Data Sheet - Standard Cable Glands, Brass


### General

For standard industrial applications  
UL and VDE certified along with various other approvals - see technical data for full details  
Easy assembly  
High quality strain relief and Seal, reliable performance for standard industrial applications  
Up-to-date international approvals.

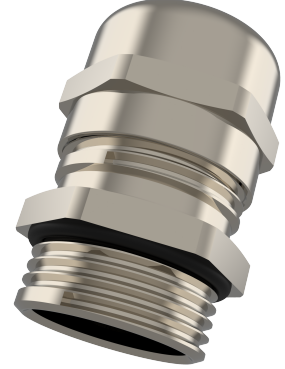

### Technical

Cap/Body Material	Nickel Plated Brass
Seal Material	Neoprene (Chloroprene)
Clamping Insert Material	Polyamide 6 V2 acc. to UL 94
O-Ring Material	NBR
Ingress Protection Rating	IP68 - 5 Bar 30 min, IP69, IP66
NEMA Type Rating	1, 4, 4X, 12, 13
Temperature Range	Permanent -20 °C to +100 °C Intermittent -40 °C to +150 °C
Thread Type	Metric, PG, NPT
Cable Type	Non-Armoured Locknuts Dome plugs Reducing seals Flat cable seals Multihole seals
Accessories	

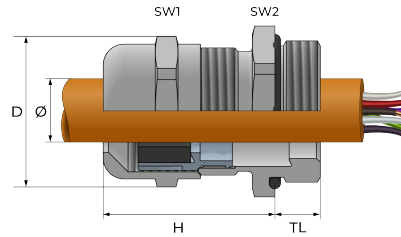

Thread Size	Cable Ø	TL	SW 1/2	Outer Ø 'D'	Max. Height 'H'	Product Code
M40x1,5	19,0 - 28,0	9,0	43/43	48,5	45,5	BMBC-E5

### Certificates



### Bimed Teknik Aletler San. ve Tic. A. Ş.

Özar Sanayi Bölgesi, Deliklikaya Mh. Yüzba Mehmet Hilmi Cd. No.28/1 Arnavutköy 34555 / İstanbul / Türkiye

T: +90 212 875 73 76

[bimedteknik.com](http://bimedteknik.com)

[info@bimedteknik.com](mailto:info@bimedteknik.com)

